

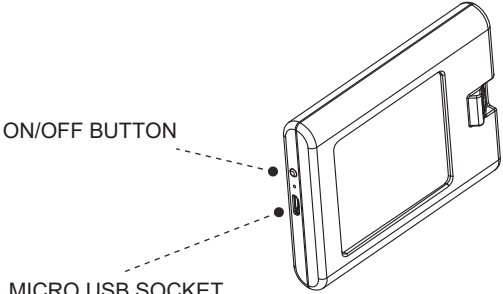



PRODUCT FEATURES:

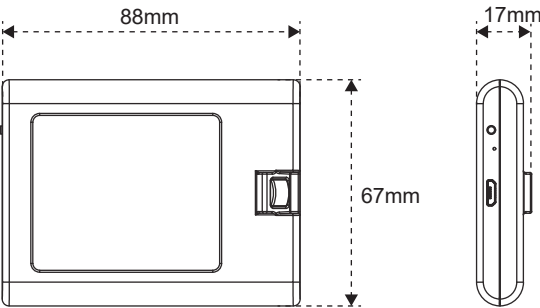

MAGNET + SCREW

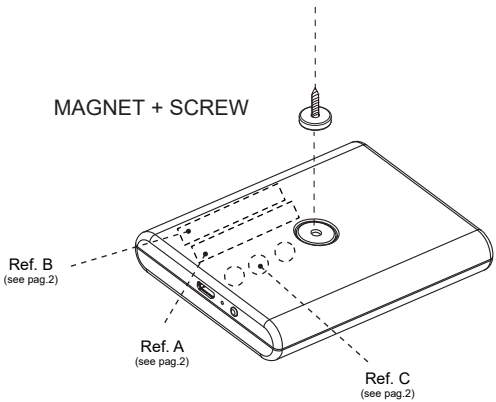

MAGNET + SCREW
(IN PLASTIC BAG)

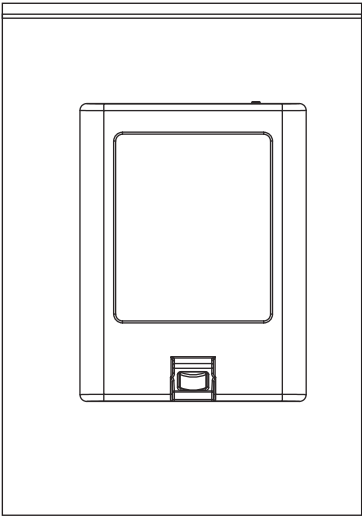

SMART MINI PIR
(IN EPE BAG)

Parameter

Rated Power:	MAX 0.4W
Input Voltage:	4.5-5.5 VDC
Input Current:	MAX 0.3A
Standby Current:	1mA
LED:	3014, 0.1W, 22PCS
CCT:	4000K
CRI:	80
Initial Luminous Flux:	28LM
Initial Luminous Efficiency:	70 LM/W
Interface:	Micro USB
Operating Temperature:	0-40 °C, <65% RH
Storage Temperature:	- 5-60°C, <75%RH
Principal Part Material:	PC

PIR Sensor Parameter

Detection Distance:	MAX 2.5m
Detection Angle:	80 °
Auto Off Delay Time:	13-17 seconds